

# THE NEW 5W LED WALLPACK!

Low Profile &  
Clean Look for  
Surface-Mount  
Applications




**RAB**<sup>®</sup>  
LIGHTING  
[www.rabweb.com](http://www.rabweb.com) • 888-722-1000

# WPLED5

- **Equivalency: 13W CFL or 60W Incandescent**
- **50,000-Hour Life Based on LM-80 Tests**
- **Three Conduit Entry Points (Backbox can be rotated to change side entry points)**
- **Low-Profile, 1 1/2" Backbox, Perfect for Surface-Mount Applications**
- **Optional Frosted Lens Included**
- **Mounting Height: 5' - 10'**
- **5-Year LED Warranty**

## Dimensions

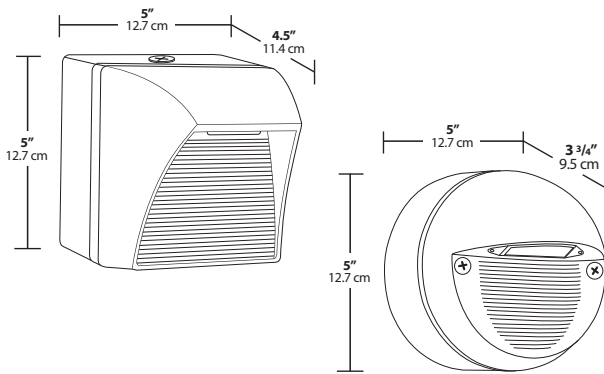

## Catalog Numbers & Accessories

<b>WPLED5</b>	Cool Light, Square, Bronze
<b>WPLED5N</b>	Neutral Light, Square, Bronze
<b>WPLED5Y</b>	Warm Light, Square, Bronze
<b>WPLEDR5</b>	Cool Light, Round, Bronze
<b>WPLEDR5N</b>	Neutral Light, Round, Bronze
<b>WPLEDR5Y</b>	Warm Light, Round, Bronze

For white, add "W" to the end of the catalog number, i.e. WPLED5YW



## Specifications

### UL Listing

Suitable for wet locations.  
Suitable for mounting within 4' of the ground.



**LEDs** 5W high-output, long-life LED

**Driver** Constant Current, Class 2, 50/60 Hz, 100 - 240VAC:  
0.18 Amps

<b>Input Watts</b>	5.3
<b>Output Lumens*</b>	196
<b>Lumens per Watt*</b>	37
<b>Color Accuracy (CRI)*</b>	69
<b>Correlated Color Temp. (Nominal CCT)*</b>	5000K

**Cold Weather Starting** Minimum starting temperature is -40°F / -40°C

**Heatsink** Integral cast aluminum mounting pad for optimum heat sinking to ensure cool operation with maximum LED life and light output

**Housing** Precision die-cast aluminum housing and mounting plate. 1 1/2" backbox with three 1/2" conduit entry points.

**Gaskets** High Temperature Silicone

**Finishes** Chip and fade resistant polyester powder coat finish in bronze or white

**Color Stability** RAB LEDs exceed industry standards for chromatic stability

**Color Uniformity** RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2008.

**Green Technology** Mercury and UV free, and RoHS compliant

**IESNA LM-79 & LM-80 Testing** RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

**ADA** WPLEDR5 (round) meets the requirements of the Americans with Disabilities Act (ADA).

**California Title 24** WPLED5 complies with California Title 24 building and electrical codes.

**Dark Sky Approved** The International Dark Sky Association has approved this product as a full cutoff, fully shielded luminaire.


**For use on LEED Buildings** IDA Dark Sky Approval means that this fixture can be used to achieve LEED Credits for Light Pollution Reduction

**Patents** The design of the WPLED5 is protected by patents pending in US, Canada, China, Taiwan and Mexico.

\* Values shown for round fixture and cool temperature. Visit [www.rabweb.com](http://www.rabweb.com) for square, neutral and warm.


## Photometrics

**WPLEDR5 - Round Fixture, 8' Mounting Ht.\***

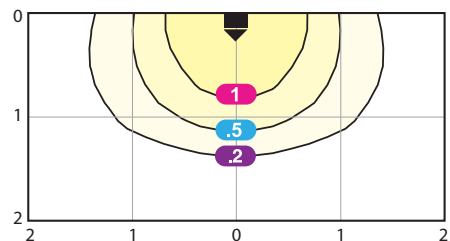

Multiples of Mounting Height - Values shown in Footcandles

**WPLED5 - Square Fixture, 8' Mounting Ht.**

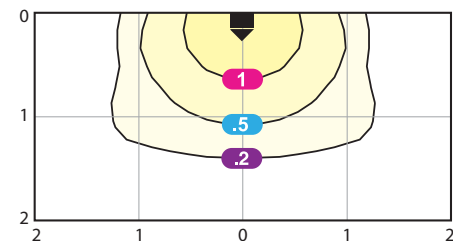

Mounting Height	Multiplier
5	2.6
6	1.8
7	1.3
8	1.0
9	0.8
10	0.6

\*Because it is ADA compliant, WPLEDR5 (round) can be mounted as low as 18". Contact RAB for more information.

